



Version 2.0.2.2x

FaxCore Konica Minolta Connector Installation and Setup Guide

Table of Contents

Disclaimers	3
Support	4
U.S. & Europe	4
Asia Pacific	4
System Requirements & Prerequisites	5
Server Requirements	5
Prerequisites	5
Installing FaxCore Konica Minolta Connector	6
Registering FaxCore Connector Applications on the MFP	8
Run FaxCore Konica Minolta Connector Setup Application.....	8
Manage Applications on the MFP	10
Additional Configurations	11

Disclaimers

FaxCore and FaxCore ev5 are registered trademarks of FaxCore, Inc. Windows is a registered trademark of Microsoft Corporation. All other trademarks are the property of their respective owners.

Support

FaxCore customers are encouraged to purchase a FaxCore Support Contract which provides them with unlimited telephone, email and web based product support from Monday to Friday 8.00 am to 5.00 pm Mountain time (GMT -7). FaxCore Partners can also provide on-site support and training when needed. FaxCore Support Contract holders are entitled to all FaxCore product service packs and upgrades at no additional charge.

Web Support: www.faxcore.com

This site contains technical information as well as a list of frequently asked questions.

U.S. & Europe

Email Support: Email support is available at support@faxcore.com

Phone Support: FaxCore support technicians can be reached at +1 (720) 870 2900

Asia Pacific

Email Support: Email support is available at support@faxcore.com.my

Phone Support: FaxCore support technicians can be reached at +60 (3) 2713 0748

System Requirements & Prerequisites

Server Requirements

FaxCore Konica Minolta Connector must be installed on a working and running FaxCore eV5 server. The connector **does not support FaxCore 2007 installations**. Upgrade to FaxCore eV5 prior to installing the connector.

MFP Requirements

For latest information please refer to <http://bit.ly/KMBestFaxCore>

Prerequisites


Configure FaxCore's RenderAgent to use Ghostscript when handling PDF files. The RenderAgent config file is in [\\faxcore\renderagent.exe.config](#) file. Open the file with Notepad, look for this setting `<add key="PDFRenderingEngine" value="" />` and set the value to "Ghostscript". Save and close the file.

Installing FaxCore Konica Minolta Connector

1. Run *FaxCore_KM_Connector.exe*.




2. Follow the on screen instruction until the “**Destination Folder**” screen and verify the location of your FaxCore root install folder.

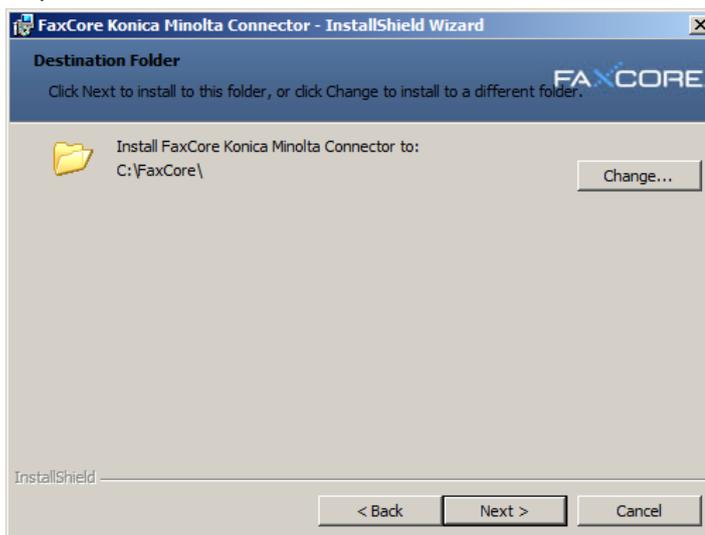

- Next you will be prompted for the FaxCore server's IP Address. The installer automatically detects the server IP address. Verify the IP address is correct and continue.



- Finally, select "Install" to begin the install process.

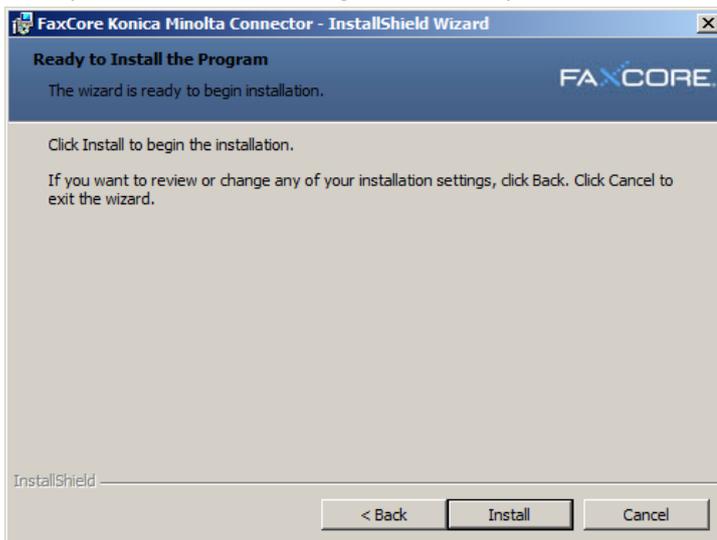

Registering FaxCore Connector Applications on the MFP

Run FaxCore Konica Minolta Connector Setup Application


1. When the installation process is completed, click on **“Start”** → **“All Programs”** → **“FaxCore”** → **“FaxCore Konica Minolta Connector Setup”**



2. Start by entering the **“IP Address”** and the admin **“Password”** of the MFP you want to connect to. You have the option to **“Register Apps”**, **“Manage Apps”** or view the **“MFP Info”**.

The screenshot shows the 'FaxCore Konica Minolta Connector Setup' application. The window title is 'FaxCore Konica Minolta Connector Setup'. The application has a 'FAXCORE' logo and a 'Help' button. The main interface is divided into several sections:

- MFP Information:** Contains input fields for 'MFP IP Address' and 'Password', and a 'Search MFPs' button.
- Navigation Tabs:** 'Register Apps' (selected), 'Manage Apps', and 'MFP Info'.
- Select Apps to Register:** Contains three checkboxes: 'FaxCore Basic (Native)?', 'FaxCore Pro (Native Type-D)?', and 'FaxCore Inbox (Pull Print Browser)?'.
- FaxCore Information:** Contains fields for 'FaxCore IP' (10.0.0.112), port '2372', and an 'SSL OFF' toggle button. Below it is an 'MFP Node/Username' field.
- Register Button:** A 'Register' button is located at the bottom of the main content area.
- Status Bar:** Shows 'Ready'.

3. To register applications, select the applications you want to register on the “Register Apps” page, verify the FaxCore server’s IP address and enter the “MFP Node/Username” (for FaxCore Browser based applications, this field is used solely as reference to the identity of the registered MFP). However, if you’re registering the FaxCore Basic (Native)/FaxCore Pro (Native Type-D) application, this field must match the FaxCore username that the MFP will use to authenticate against FaxCore.
4. Toggle the SSL to  if FaxCore is configured to connect with HTTPS only.
5. When ready, click on the **“Register”** button.
6. You can now access the applications from the MFP. For more information, refer to [FaxCore Konica Minolta Connector User Guide](#).

Manage Applications on the MFP

The “**Manage Apps**” tab allow you to view and delete registered FaxCore applications on the MFP.

The screenshot displays the 'FaxCore Konica Minolta Connector Setup' window. At the top, there is a 'Help' button. Below it, the 'MFP Information' section contains fields for 'MFP IP Address' (192.168.146.133) and 'Password' (masked with dots), along with a 'Search MFPs' button. A navigation bar below this section has three tabs: 'Register Apps', 'Manage Apps' (which is selected and highlighted in blue), and 'MFP Info'. The main content area is titled 'Application List' and contains a table with three columns: 'No', 'Name', and 'Application Type'. The table lists three applications: 'FaxCore' (Scan Browser), 'FaxCore Inbox' (PullPrint Browser), and 'FaxCore Basic' (Scan Type-S). The 'FaxCore Basic' row is highlighted in yellow. To the right of the table are 'Refresh' and 'Delete' buttons. At the bottom left of the window, the status 'Ready' is displayed.

No	Name	Application Type
2	FaxCore	Scan Browser
3	FaxCore Inbox	PullPrint Browser
4	FaxCore Basic	Scan Type-S

To delete application, select the app from the application list, and click “Delete”.

Additional Configurations

The connector allows you to change default scan settings to achieve optimum output results. To do this, follow the instructions below.

Locate the following file in `installdir\FaxCore\web\OAPI40\web.config`

Open file with Notepad.exe

Search for “ColorType”, change its value to “GrayScale” (in “appSettings” and “applicationSettings” section). Save file and close. Restart FXC3.OpenAPI window service.